


**STANDARD FEATURES:**

- AASHTO H20 RATED TO 6 FT DEPTH (TO BOTTOM OF TANK)
- 750 & 1250 GALLON SIZES (APPROX)
- 4500 PSI CONCRETE
- GRADE 60 REINFORCING
- 8" TRAFFIC BEARING LID
- 4" WALLS AND FLOOR

**NOTES:**

- ALLOW FOR MANHOLE RING AND COVER IN TOTAL HEIGHT
- STANDARD INLET AND OUTLET FITTINGS ARE 4" RUBBER BOOTS
- CONFORMS TO CITY OF AUSTIN OIL WATER SEPARTOR DESIGN BY R.J. BRANDES, 1998

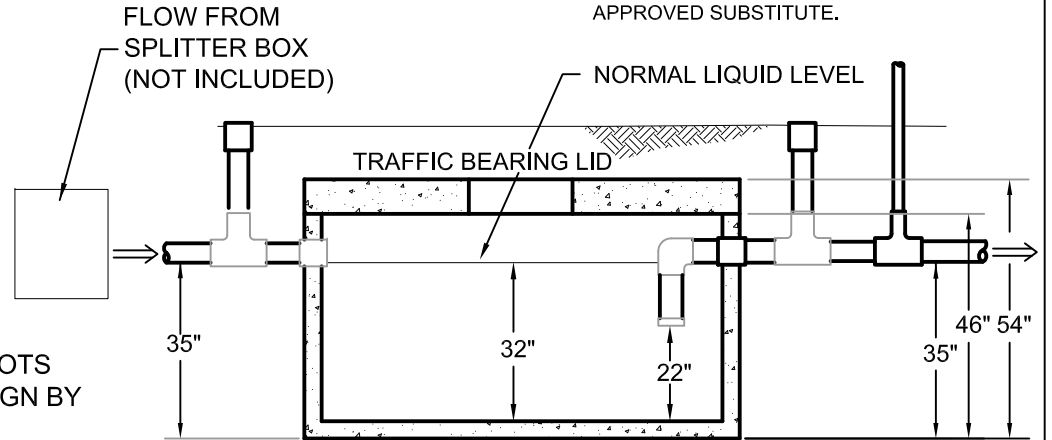

| SIZE:              | 750 | 1000 | 1250 |
|--------------------|-----|------|------|
| <b>DIMENSION A</b> | 99" | 127" | 134" |
| <b>DIMENSION B</b> | 65" | 66"  | 75"  |

**LOW PROFILE OIL WATER SEPARATOR - CITY OF AUSTIN**

**HILL COUNTRY CONCRETE PRODUCTS, INC.**

PO Box 357  
 Kyle, Texas 78640  
 512.268.9711  
 Austin Line 512.476.5838  
 Fax 512.268.0215  
 hillcountryconcrete.com

LOW PROFILE OIL WATER SEPARATOR - CITY OF AUSTIN